

SPACERLINK

Through Bolt Anchor



SCAN ME

www.safetylink.com



SCAN ME

Catalogue




SCAN ME

Anchor Layout Video

DATA SHEET



FS 707792

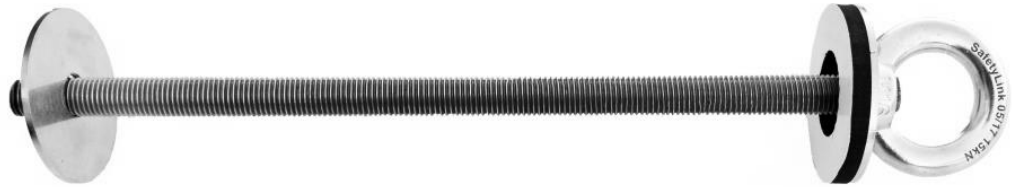

Example: components site specific

WHAT AM I USED FOR?

An anchor point designed for through bolting. Standard SpacerLink 250mm rod, advise length required when needed.


SPACERLINK SHOULD NOT BE POSITIONED CLOSE TO AN EDGE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

⚠ If any doubt exists as to the strength of the structure an engineer should make the assessment.

COMPLETE UNIT - PRODUCT CODE: SPACE001			Weight: 0.701kg
Product Parts	Description	Qty	Material
EYENUT M16	Eyenut: M16 Collared	1	316 Stainless Steel
WASHER 70od-SS+FOAM	Washer: 70OD with foam	1	316 Stainless Steel
ROD-per metre	Threaded Rod: M16 250mm	1	Steel
WASHER 70OD-SS	Washer: 70OD	1	316 Stainless Steel
WASHER M16_SPRING	Spring Washer: M16	1	316 Stainless Steel
NUT M16	Nut: M16	1	316 Stainless Steel

All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd.



© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-63 Version: 15.0

Asia-Pacific/The Americas
info@safetylink.com

Europe/Africa/Middle East
europe.sales@safetylink.com

Northern Europe
uk.sales@safetylink.com