





LAD002.LHD



LAD002.SEC.8

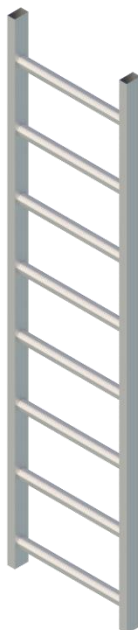

LAD002.SEC.4

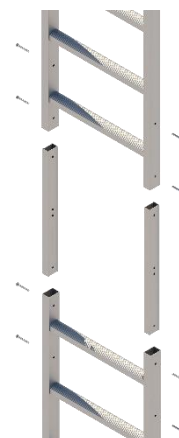

LAD002.SPL.K

- ▲ All rungs are ergonomically designed for maximum grip at all angles.
- ▲ Heavy gauge aluminium for superior strength.
- ▲ Join Splice Joint to sections using supplied 12Gx20mm self tapping screws.
- ▲ FastFit ladder system is designed for single person use and rated for maximum 150kg.
- ▲ FastFit ladders are manufactured to AS 1657:2018 Standards.



SCAN ME
Manual



SCAN ME
Website



SCAN ME
Catalogue



SCAN ME
Safety Centre
Training

Product Code	Description	Material	Weight (kg)
LAD002.LHD	Ladder Head Section: 2400mm (5 rung)	Aluminium	7.770
LAD002.SEC.8	Ladder Section: 2400mm (8 rung)	Aluminium	7.770
LAD002.SEC.4	Ladder Section: 1200mm (4 rung)	Aluminium	3.885
LAD002.SPL.K	Kit: 2 x Splice Joint 600mm & 8 Screws	Aluminium	0.988

Ladder Examples



LAD002.042



LAD002.042+BASE



LAD002.052+BASE

A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-903 Version: 9.0