

# BRASS BOLT



SCAN ME  
Terms and  
Conditions



SCAN ME  
Catalogue




SCAN ME  
Chemical Adhesive  
Data Sheet



SCAN ME  
Installation  
Handbook

# DATA SHEET

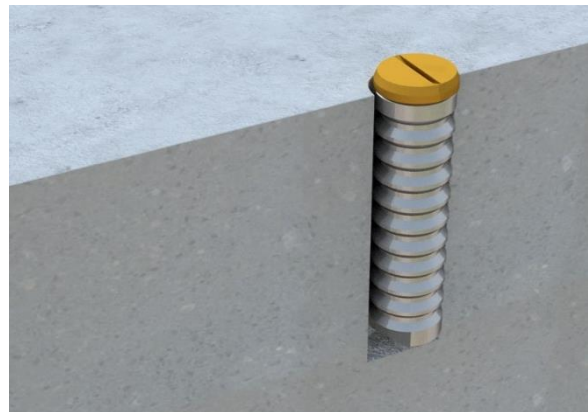

- Brass Bolt to be used with Concrete Insert when eyebolt not in use.
- Keeps internal section of insert free from debris.

## WHAT AM I USED FOR?

Designed for use in concrete insert to prevent from debris when not in use.

The building or structure for the anchorages must be assessed by an engineer, unless it is clear to a competent person that the structure is adequate.

## Testing for concrete mounted anchor.

To comply with current Standards each Concrete unit must be tested after installation. Allow required curing time as specified in manual before testing. Test consists of pull out force to 50% of design load of anchorage. **Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.**

## [VIDEO LINK: HOW TO INSTALL CONCRETELINK](#)

### COMPLETE UNIT - PRODUCT CODE: CONCL006

Product Parts	Description	Qty	Weight (kg)	Material
CONCL006	M16 Brass Bolt	1	0.204	Brass

© 2018, SafetyLink Pty Ltd, Australia.

**Patents:** SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@safetylink.com](mailto:ip@safetylink.com) and quote the product code.

Doc ID: MKT-28 Version: 17.0

Asia-Pacific/The Americas  
[info@safetylink.com](mailto:info@safetylink.com)

Europe/Africa/Middle East  
[europa.sales@safetylink.com](mailto:europa.sales@safetylink.com)

Northern Europe  
[uk.sales@safetylink.com](mailto:uk.sales@safetylink.com)