

- ▲ Suspended Ladder Bracket is used at bottom of ladder when suspended off ground.
- ▲ FastFit ladder system is designed for single person use and rated for maximum 150kg.
- ▲ FastFit ladders are manufactured to AS 1657:2018 Standards.

COMPLETE UNIT - PRODUCT CODE: LADER002.BRK.SPND			
Product Code	Description	Material	Qty
LADER002.BRK.SPND.01	Suspended Ladder Bracket 250mm	Aluminium	1
BOLT-M8x60mm Cup HD	Bolt: M8 x 60mm Cup Head	316SS	4
NUT M8 Flanged_316	Flanged Nut: M8	316SS	4



SCAN ME  
Manual




SCAN ME  
Website



SCAN ME  
Catalogue



SCAN ME  
Safety Centre  
Training

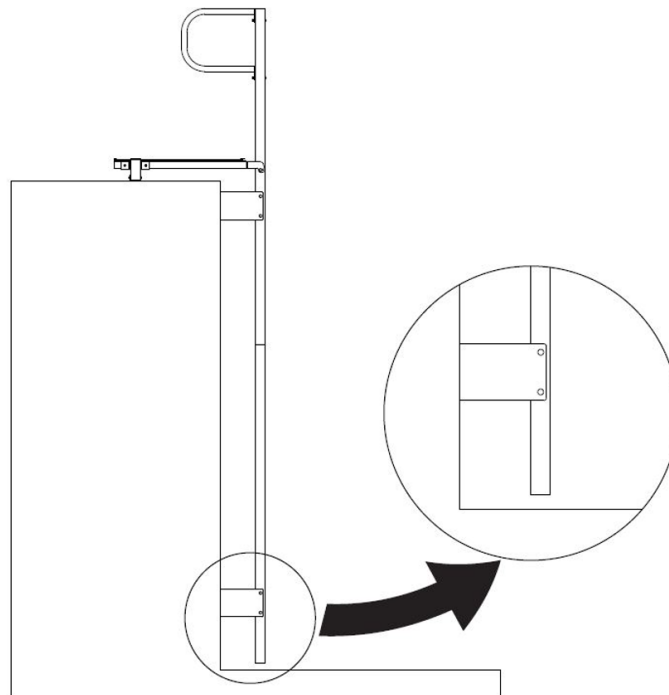

**A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT**

© 2018, SafetyLink Pty Ltd, Australia.

**Patents:** SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on [ip@safetylink.com](mailto:ip@safetylink.com) and quote the product code.

Doc ID: MKT-1085 Version: 3.0