




- ▲ Top Platform for Ladderhead with angle supports.
- ▲ For use on roof pitches 0 to 8 degrees.
- ▲ FastFit ladder system is designed for single person use and rated for maximum 150kg.
- ▲ FastFit platforms are manufactured to AS 1657:2018 Standards.

COMPLETE UNIT - PRODUCT CODE: LADER002.PLT.TOP.3200		Weight: TBA	
Product Code	Description	Material	Qty
LADER002.PLT.TOP.3200.01	Platform: Ladderhead Top Side Entry	Aluminium	1
GUARD001.GATE_700	Gate: 700mm	Aluminium	1
NUT M8 Flanged_316	Flanged Nut: M8	316SS	26
BOLT-M8x30mm Cup HD	Bolt: M8x30mm Cup Head	316SS	20
SCREW 12-14x20mm	Screw: 12-14x20mm Self Tapping	Galvanised	28
SCREW 12-14x50mm	Screw: 12-14x50mm Self Tapping	Galvanised	14
BOLT-M8X20mm Cup HD	Bolt: M8x20mm Cup Head	316SS	6
RIVET_5x22mm	Rivet: 05 x 22mm	Aluminium	6
FOAM-TAPE-SQUARE	Foam Tape: 40 x 40 x 1.6mm	EPDM	6
GUARD_HR.ELBW	Handrail Elbow Joint Kit	Aluminium	1
GUARD_KR.ELBW	Kneerail Elbow Joint Kit	Aluminium	1



Safety Centre
Training

Ladder Example

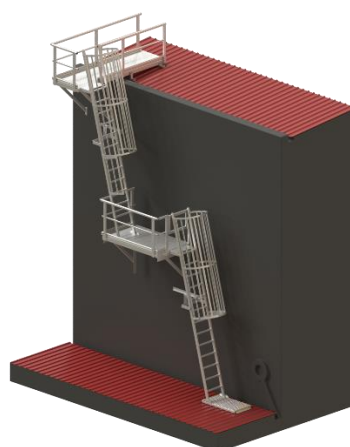

Kit: LADERK002.093

A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT

© 2018, SafetyLink Pty Ltd, Australia.

Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-1068 Version: 5.0