



Terms and Conditions



Catalogue

CONCRETE CAST-IN CAGES

Davit Fixing

SafetyLink's ConcreteLink Cast In Cages are concrete studs set at the correct spacing for different products. The cages are to be installed prior to the concrete being poured.

Tested to AS/NZ5532 when tested with SafetyLink Anchors.

Concrete Minimum: 32MPa.
 Template Material: Steel.
 Stud Material: Galvanised.
 Install Torque M16: 70Nm.


CAST-IN CAGE FOR FLOOR MOUNTED DAVIT BASE PRODUCT CODE: DAVIT_BASE05

Product Parts	Description	Qty
DAVIT_BASE05.01	Cast In Cage Stud M16	4
DAVIT_BASE05.02	Casting Jig for Cast In Cage	2
CON-CAST.02	Reo Bar: 12mm x 595mm	2
WASHER M16_Spring_GAL	Washer: M16 Spring	4
WASHER M16-8.8	Washer: M16 Structural HDG	4
NUT M16-8.8	Nut: M16 Structural HDG	



Cast In Cages's shall be installed at the depth, edge distance and slab thickness provided in the installation handbook (see Figure 2 from handbook below).

Figure 2				
	150mm Tuff Post	300, 600 & 900mm Round Tuff Post	Floor Mounted Davit Base	
SS316	CON-CAST-TP150R_SS	CON-CAST-TP300R_SS	N/A	
GALV	CON-CAST-TP150R_GAL	CON-CAST-TP300R_GAL	DAVIT_BASE05	
Min Install Depth	100mm	110mm	140mm	
Min Slab Thickness	150mm	150mm	200mm	
Min Edge Distance	150mm	150mm	200mm	

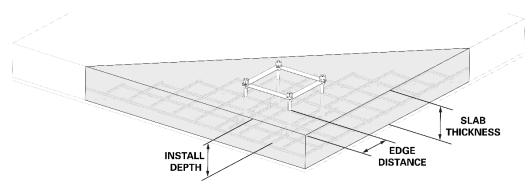



Patents: SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-1290 Version: 1.0

